
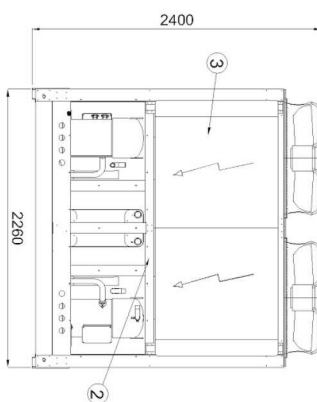
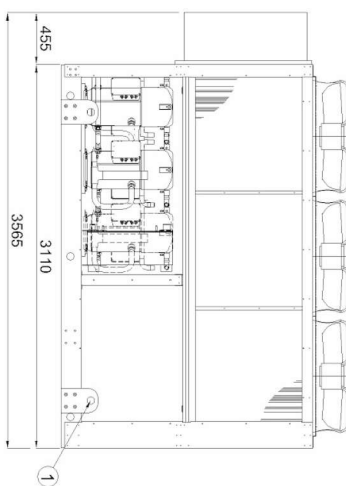


AWA PROZONE 2390 Z C - R410A

CAPACITY	Cooling Capacity		[kW]	373					
	Compressors power input		[kW]	134					
ENERGETIC PERFORMANCES	EER	2,79	Total EER	2,61					
COMPRESSORS	COMPRESSORS								
	Refrigerant circuits			4					
	Unloading steps			2					
	Refrigerant charge		[kg]	8					
	Oil charge		[kg]	58,4					
SOURCE	Fans								
	Nominal air flow		[m³/h]	6					
	Air temperature		[°C]	128160					
	Power input (each)		[kW]	35,0					
	Running current for each fan		[A]	1,50					
USER	Fluid type								
	Fluid temp. in/out		[°C]	Water					
	Heat exchangers number			12,0/7,0					
	Heat exchanger water flow		[m³/h]	1					
	Heat exchanger pressure drop		[kPa]	64,0					
ELECTRICAL DATA (not included pump)	FLI	[kW]	142.9	FLI maximum	[kW]	202.1			
	FLA	[A]	224.0	FLA maximum	[A]	356.0			
	SA	[A]	579.5	SA maximum	[A]	679.0			
	LRA	[A]	413.0	ESP	[V-ph-Hz]	400/3+n/50			
	ACOUSTIC DATA								
Sound level pressure at 20 m (ISO 3744)						[dB(A)]	57		
Sound level pressure at 10 m (ISO 3744)						[dB(A)]	63		
Sound level pressure 5 m (ISO 3744)						[dB(A)]	68		
Sound level pressure 1 m (ISO 3744)						[dB(A)]	75		
Sound power level (ISO 3744)						[dB(A)]	95		
Hz		63	125	250	500	1000	2000	4000	8000
[db]		72	68	64	59	57	55	48	44
DIMENSIONS	Length	[mm]	3565	Height	[mm]	2400			
	Width	[mm]	2260	Weight	[kg]	3019			

AWA PROZONE 2390 Z C - R410A



- ① FORI DI SOLLEVAMENTO
LIFTING HOLES
- ② ALIMENTAZIONE ELETTRICA
ELECTRIC POWER SUPPLY
- ③ QUADRO ELETTRICO
ELECTRIC BOX
- ④ ENTRATA ACQUA EVAPORATORE
WATER INLET EVAPORATOR
- ⑤ USCITA ACQUA EVAPORATORE
WATER OUTLET EVAPORATOR
- ⑥ PUNTI DI CARICO
LOADING POINTS
- ⑦ RIGRESSO ACQUA RECUPERATORE SUPERHEATER
WATER INLET HEAT RECOVERER SUPERHEATERS
- ⑧ USCITA ACQUA RECUPERATORE SUPERHEATER
WATER OUTLET HEAT RECOVERER SUPERHEATERS
- ⑨ SPAZIO MINIMO DI RISPETTO
MINIMUM DISTANCE

